


# 308E2 CR Mini Hydraulic Excavator with Swing Boom

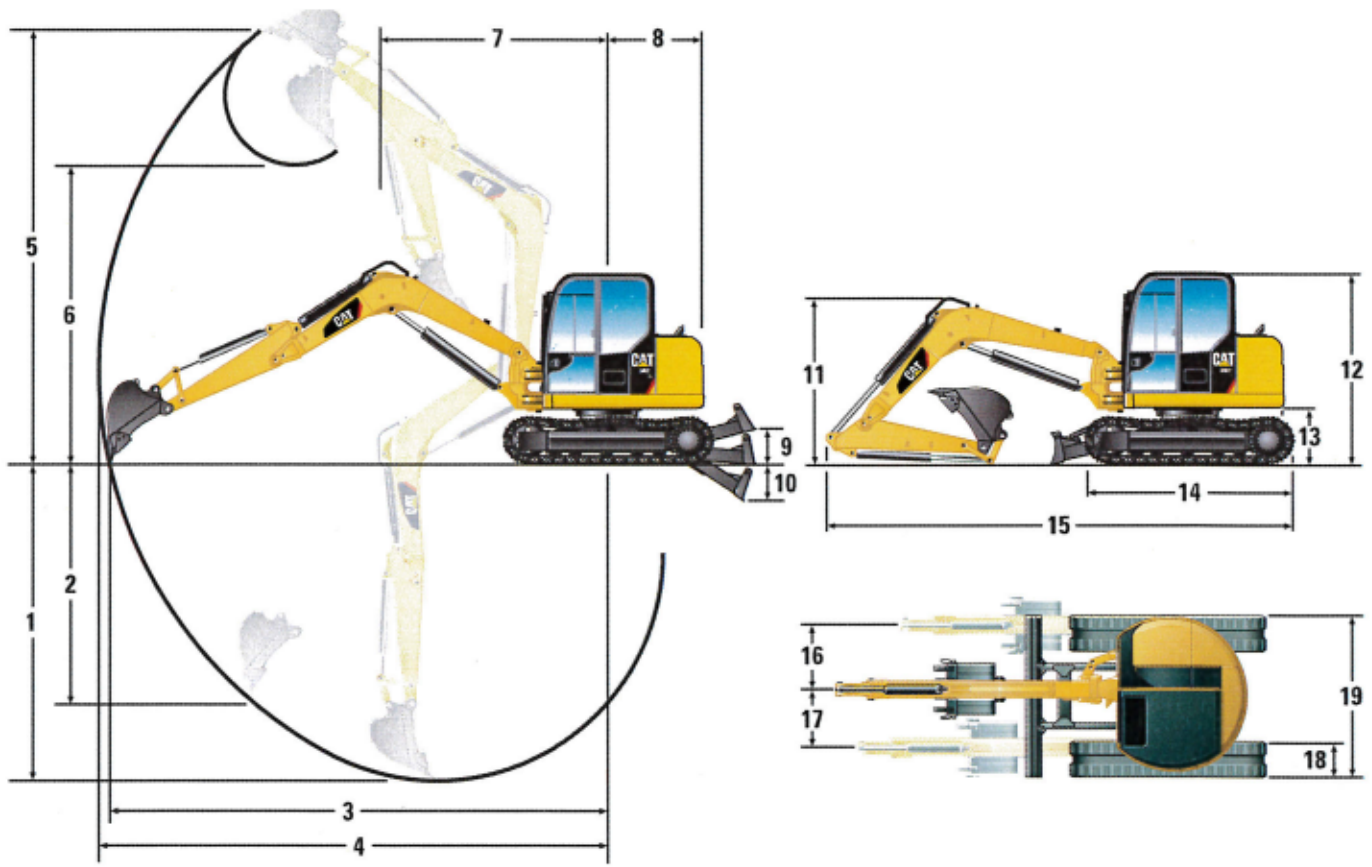

### Dimensions

|    | Standard Stick |       | Long Stick |        |
|----|----------------|-------|------------|--------|
| 1  | 4150 mm        | 13'7" | 4690 mm    | 15'5"  |
| 2  | 2980 mm        | 9'9"  | 3550 mm    | 11'8"  |
| 3  | 6820 mm        | 22'9" | 7350 mm    | 24'1"  |
| 4  | 7020 mm        | 23'0" | 7540 mm    | 24'9"  |
| 5  | 6640 mm        | 21'9" | 6990 mm    | 22'11" |
| 6  | 4670 mm        | 15'4" | 5010 mm    | 16'5"  |
| 7  | 2800 mm        | 9'2"  | 3280 mm    | 10'9"  |
| 8  | 1450 mm        | 4'9"  | 1450 mm    | 4'9"   |
| 9  | 420 mm         | 1'5"  | 420 mm     | 1'5"   |
| 10 | 320 mm         | 1'1"  | 320 mm     | 1'1"   |

|    | Standard Stick |        | Long Stick |        |
|----|----------------|--------|------------|--------|
| 11 | 2280 mm        | 7'6"   | 2230 mm    | 7'4"   |
| 12 | 2550 mm        | 8'4"   | 2550 mm    | 8'4"   |
| 13 | 735 mm         | 2'5"   | 735 mm     | 2'5"   |
| 14 | 2903 mm        | 9'6"   | 2903 mm    | 9'6"   |
| 15 | 6380 mm        | 20'11" | 6340 mm    | 20'10" |
| 16 | 1010 mm        | 3'4"   | 1010 mm    | 3'4"   |
| 17 | 635 mm         | 2'1"   | 635 mm     | 2'1"   |
| 18 | 450 mm         | 1'6"   | 450 mm     | 1'6"   |
| 19 | 2320 mm        | 7'7"   | 2320 mm    | 7'7"   |

### Lift Capacities at Ground Level\*

| Lift Point Radius |    | 4000 mm (13'1") |       | 6050 mm (19'10") |       |
|-------------------|----|-----------------|-------|------------------|-------|
|                   |    | Front           | Side  | Front            | Side  |
| Blade Down        | kg | 3650            | 1710  | 1880             | 920   |
|                   | lb | 8,046           | 3,770 | 4,144            | 2,028 |
| Blade Up          | kg | 1840            | 1530  | 970              | 820   |
|                   | lb | 4,056           | 3,373 | 2,138            | 1,808 |

\* The above loads are consistent with hydraulic excavator lift capacity rating standard ISO 10567:2007 and they do not exceed 87% of hydraulic lifting capacity or 75% of tipping capacity. The excavator bucket weight is not included on this chart. Lifting capacities are for standard stick.